

SIGNS, BRAILLE TAGS & CERTIFICATE FRAMES



Questions? Answers at...

Western US: 1-866 CED-ELEV
or 1-866-233-3538 • Fax 1-562-427-8429

Eastern US: 1-866-253-2915
or 1-860-256-2211 • Fax 1-860-290-8970

or visit us online at

www.cedelevator.com

*for 24 hour order entry,
cross reference data base,
product specifications
with pictures and much more!*

Full line catalog available on request

30

In this Section

Die Cast Signs

Cab Control Plates 30.2-5

Door Jamb Plates 30.7

Metal Stamped Signs

Cab Control Plates 30.6

Door Jamb Plates 30.8

Screen Printed Specialty Signs

Firefighter's Operation 30.9

In Case of Fire, Medical,
Identification 30.10-11

Acrylic Signs

In Case of Fire 30.12

Escalator Safety,
No Smoking, Capacity 30.13

Main Station or Phase 1 30.14

Car Station or Phase 2 30.15

Warning, Danger,
Data Tags 30.16-17

Certificate Frames 30.17

**CC2**

(ANSI Compliant)

Size

1.250" square
 0.085" material thickness (0.125" with FLC5)
 0.125" corner radius
 0.625" character height

Designation Color: Natural, painted**Background Color:** Painted**Mounting:** Front Mechanical or Back Flange Mounting (**FLM1, FLM2**)**Finishes:** See Standard Finishes**CC3**

(ANSI Compliant)

Size

1.50" square
 0.060" material thickness
 0.125" corner radius
 0.625" character height

Designation Color: Natural, Painted**Background Color:** Painted**Mounting:** Front Mechanical or Back Flange Mounting (**FLM1, FLM2**)**Finishes:** See Standard Finishes

NOTE: Can be fitted with shims to adapt to your panel thickness to achieve "flush" mount design.

**CC5**

(ANSI Compliant)

Size

1.375" round
 0.085" material thickness
 0.625" character height

Designation Color: Natural, Painted**Background Color:** Painted**Mounting:** Front Mechanical or Back Flange Mounting (**FLM1, FLM2**)**Finishes:** See Standard Finishes

NOTE: Can be fitted with shims to adapt to your panel thickness to achieve "flush" mount design.

Standard Finishes: Satin Nickel, Satin Bronze, Mirrored Stainless, Mirrored Bronze, Black & White, Nickel Painted, Goldleaf Painted, US26

Questions? Answers at...

Cab Plates — Die Cast

CC6

(ANSI Compliant)

Size

1.50" round
0.060", material thickness
0.625" character height


Designation Color: Natural, painted

Background Color: Painted

Mounting: Front mechanical or back flange mounting (**FLM1 or FLM2**)

Finishes: See Standard Finishes

NOTE: Can be fitted with shims to adapt to your panel thickness to achieve "flush" mount design. Retrofit version to fit existing 1.375" cut out.

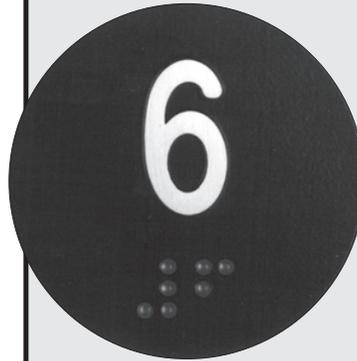

CC7

Size

0.755" x 1.13"
0.063", 0.100" material thickness
0.125" corner radius
0.628" character height

Designation Color: Natural, painted

Background Color: Painted

Mounting: Front mechanical

Finishes: See Standard Finishes

NOTE: Can be fitted with shims to adapt to your panel thickness to achieve "flush" mount design.



CHLP

(ANSI Compliant)

Size

2.425" x 1.250"
0.0875" material thickness
0.625" character height

Designation Color: Natural, painted

Background Color: Painted

Mounting: Front mechanical

Finishes: See Standard Finishes



Optional Mounting Flanges & Retainers available on request

Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

**CK1**

(ANSI Compliant)

Size

2.050" x 1.375"

0.065" material thickness

0.625" character height


Designation Color: Natural, painted**Background Color:** Painted**Mounting:** Front mechanical**Finishes:** See Standard Finishes**CW1****Size**

2.75" x 1.50"

0.120" material thickness

Background Color: Natural, painted**Mounting:** Reference CW2**Finishes:** See Standard Finishes (uS26 not available)

NOTE: Button opening available in 1.204", 1.270", 1.375", and custom diameters. Available in custom colors to meet parking garage level requirements.

**CW2**

(ANSI Compliant)

Size

1.565" x 1.358"

0.055" material thickness

0.625" character height

Designation Color: Natural, painted**Background Color:** Painted**Mounting:** Front mechanical**Finishes:** See Standard Finishes**Questions? Answers at...**

30.4

 Western US: 866 CED-ELEV Eastern US: 866-253-2915
 or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

Standard Finishes: Satin Nickel, Satin Bronze,
 Mirrored Stainless, Mirrored Bronze, Black & White,
 Nickel Painted, Goldleaf Painted, US26

Cab Plates — Die Cast

CIP1 & RIP1

(ANSI Compliant)

Size


1.575" x 1.063"
0.059" corner radius
0.052" material thickness
(CIP1 Die Cast Metal, RIP1 Plastic)
1.499" character height

Designation Color: Natural, painted

Background Color: Painted

Mounting: Adhesive

Finishes: See Standard Finishes
(RIP1 Black & White only)

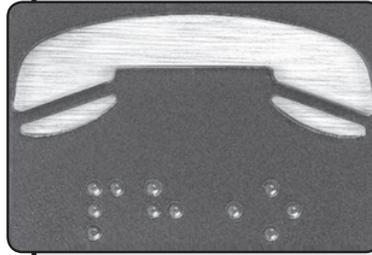

CM1

Size

3.0" x 3.0" [Use 2.50" diameter opening]
0.173" material thickness

Designation Color: Painted

Background Color: Natural

Mounting: Back Flange Mounting

Finishes: Satin Stainless, Satin Bronze,
Mirrored Stainless, Mirrored Bronze



CPI

Size

3.375" x 1.125"
Square corner radius, 0.120" thick.
0.25" raised capacity height
0.255" engraved weight height

Designation Color: Natural, painted

Background Color: Painted

Mounting: Front mechanical

Finishes: Satin Stainless, Satin Bronze, and Black

NOTE: Capacity plates are available in any duty/weight, English, metric or both.



CST1

Size

3.50" square
0.100 material thickness
0.125" (3.2mm) corner radius

Designation Color: Natural, Painted

Background Color: Natural, Painted

Mounting: Front mechanical or back flange
mounting (FLM4)



Finishes: Satin Stainless, Satin Bronze, Mirrored
Stainless, Mirrored Bronze, Blue and White



**Optional Mounting Flanges & Retainers
available on request**

Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970



Cab Plates

Metal Stamped, Resin

EC1R

Size

EC1R: 1.375" round; **EC15R:** 1.50" round
 0.032" material thickness
 0.625" character height

Designation Color: Natural, Painted

Background Color: Natural, Painted

Mounting: Adhesive or One Threaded Stud

Finishes: Satin Stainless, Satin Bronze, Mirrored
 Stainless, Mirrored Bronze, Black and White

EC1 (ANSI Compliant)

Size

EC1: 1.250" square; .0625" or .125" corner radius
EC15: 1.50" square; .0625" corner radius
 0.032" material thickness
 0.625" character height

Designation Color: Natural, Painted

Background Color: Natural, Painted

Mounting: Adhesive or One Threaded Stud

Finishes: Satin Stainless, Satin Bronze, Mirrored
 Stainless, Mirrored Bronze, Black and White

EC1125 (ANSI Compliant)

Size

1.250" square
 0.032" material thickness
 0.625" or 0.125" corner radius
 0.625" character height

Designation Color: Natural, Painted

Background Color: Natural, Painted

Mounting: Adhesive or One Threaded Stud

Finishes: Satin Stainless, Satin Bronze, Mirrored
 Stainless, Mirrored Bronze, Black and White

RCUT (ANSI Compliant)

Size

1.358" x 1.955"
 0.032" material thickness (Resin)
 0.625" character height

Designation Color: White

Background Color: Black

Mounting: Two Studs, Adhesive

Finishes: White, Satin Silver, Satin Gold

**Optional Mounting Flanges & Retainers
 available on request**

Questions? Answers at...

30.6 Western US: 866 CED-ELEV Eastern US: 866-253-2915
 or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

Jamb Plates Die Cast

CJ1

Size

3.50" x 2.50"; 0.125" corner radius
0.100" material thickness (Die Cast Metal)
2.00" character height

Designation Color: Natural, Painted

Background Color: Painted

Mounting: Front Mechanical

Finishes: See Standard Finishes



CJ4 (ANSI Compliant)

Size

2.50" x 3.50"; 0.125" corner radius
0.080" material thickness (Die Cast Metal)
2.00" character height

Designation Color: Natural, painted

Background Color: Painted

Mounting: Front Mechanical or Back Flange

Mounting to your panel specifications (FLM5)

Finishes: See Standard Finishes



EJ3 (ANSI Compliant)

Size

3.00" x 3.50"; .0625" corner radius
0.032" material thickness (Metal Stamped)
2.00" character height

Designation Color: Natural, painted

Background Color: Natural, painted

Mounting: 4 Corner Holes with Drive Pins, Adhesive

Finishes: Satin Stainless, Satin Bronze, Mirrored
Stainless, Mirrored Bronze, Black and White



EJ4 (ANSI Compliant)

Size

4.00" square
0.032" material thickness (Die Cast Metal)
0.0625" corner radius
2.00" character height

Designation Color: Natural, painted

Background Color: Natural, painted

Mounting: 4 Corner Holes with Drive Pins, Adhesive,
 $\frac{6}{32}$ Weld Studs

Finishes: Satin Stainless, Satin Bronze, Mirrored
Stainless, Mirrored Bronze, Black and White



Standard Finishes: Satin Nickel, Satin Bronze,
Mirrored Stainless, Mirrored Bronze, Black & White,
Nickel Painted, Goldleaf Painted, US26

Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970


 PLG

EJ45
Size

4.00" x 5.00" (This size used for 3-character combos)
 0.032" material thickness (Metal Stamped)
 0.0625" corner radius
 2.00" character height

Designation Color: Natural, painted

Background Color: Natural, painted

Mounting: 4 Corner Holes with Drive Pins, Adhesive

Finishes: Satin Stainless, Satin Bronze, Mirrored
 Stainless, Mirrored Bronze, Black and White


 2

RJ4 (ANSI Compliant)

Size

4.00" square
 0.080" material thickness (Resin)
 0.0625" corner radius
 2.00" character height

Designation Color: White

Background Color: Black

Mounting: Adhesive

Finishes: White, Satin Silver, Satin Gold


 ELEVATOR
 10

SVB229 (A17.1-2000)

4.00" square plate
 3.00" character height

(Elevator number designation requirement)

one per jamb, mounted adjacent to or on every
 elevator entrance at the designated level per A17.1-
 2000 2.29.1

Questions? Answers at...

30.8

Western US: 866 CED-ELEV Eastern US: 866-253-2915
 or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

Specialty Signs Screen Printed

SVB12 (Phase II ANSI 1993)

SVB41 (Phase II ANSI 1996)

Size

6.90" x 4.40"

Material thickness: 0.032" metal / 0.020" Lexan

Square corner radius

Character height: 0.25" title / 0.188" text

Designation Color: Painted

Background Color:

SVB12: Natural, white **SVB41:** Black

Mounting: Adhesive

Finishes: Satin Stainless, Satin Bronze, Mirrored Stainless, Mirrored Bronze, Matte Plastic

SVB59 (Phase II ANSI 1998)

SVB79 (Phase II ANSI 2000)

Phase II Firefighter's Instructions

ANSI A17.1-2000 (Latest Code) not pictured.

Size

6.9" x 5.275"

Material thickness: 0.032" metal / 0.020" Lexan

Square corner radius

Character height: 0.25" title/0.188" text

Designation Color: Painted

Background Color:

SVB59: Natural, white **SVB79:** Black

Mounting: Adhesive

Finishes: Satin Stainless, Satin Bronze, Mirrored Stainless, Mirrored Bronze, Matte Plastic

SVB6/SVB70/SVB70R (Phase I ANSI Compliant)

Size

SVB6 4.00" x 1.45";

SVB70/SVB70R 3.375" x 3.00"

Material thickness: 0.032" metal / 0.020" Lexan

Square corner radius





Character height: 0.25"

Designation Color: Black


Background Color: Natural, white

Mounting: Adhesive

Finishes: Satin Stainless, Satin Bronze, Mirrored Stainless, Mirrored Bronze, Matte Plastic

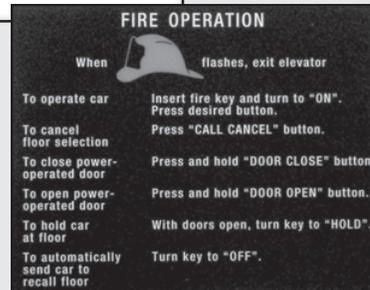

SVB6



SVB70R
ALSO AVAILABLE WITH
KEY "BYPASS" (SVB70)

Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

**SVB80****Size**

4.00" square

Material thickness: 0.032" metal / 0.020" Lexan

Square corner radius

3.00" character height

Designation Color: Blue**Background Color:** Natural, white**Mounting:** Adhesive**Finishes:** Satin Stainless, Satin Bronze, Mirrored Stainless, Mirrored Bronze, Matte Plastic**SVB13** (ANSI Compliant, Appendix H, Appendix O)**Size**

5.00" x 8.00"

Material thickness: 0.032" metal / 0.020" Lexan

Square corner radius

0.30" character height–text

6.00" character height–pictogram

Designation Color: Black text, red flame**Background Color:** Natural, white**Mounting:** Adhesive**Finishes:** Satin Stainless, Satin Muntz, Mirrored Stainless, Mirrored Muntz, Matte Plastic**SVB30** (California Code)**Size**

5.00" x 8.00"

Material thickness: 0.032" metal / 0.020" Lexan

Square corner radius

0.50" character height–text

4.00" character height–pictogram

Designation Color: Black text, red flame**Background Color:** Natural, white**Mounting:** Adhesive**Finishes:** Satin Stainless, Satin Muntz, Mirrored Stainless, Mirrored Muntz, Matte Plastic**Questions? Answers at...**
30.10 Western US: 866 CED-ELEV Eastern US: 866-253-2915
 or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

Specialty Signs Screen Printed

SUB229 (ANSI Compliant) (Elevator Identification for Entrance)

Size
 4.00" x 4.00"
 Material thickness: 0.030" metal
Mounting: Adhesive
Finishes: Black Background with White Text
 or Stainless Background with Black Text





SUB229COP (Elevator Identification for COP)

Size
 3.250" x 1.250"
 Material thickness: 0.020" aluminum
Mounting: Adhesive
Finishes: Black background with white text
 or Stainless background with black text



R380 & R580 (Meets ANSI, Appendix H, Appendix O) (Insert Only)

Size
R380: 4.110" x 3.120"
R580: 6.0" x 4.250" (Flame size)
 Material thickness: Designed for 11-gauge or less panel thickness – Resin
Designation Color: Black text, red flame
Background Color: White
Mounting: Flanged insert; laser cutout file provided with part purchase.

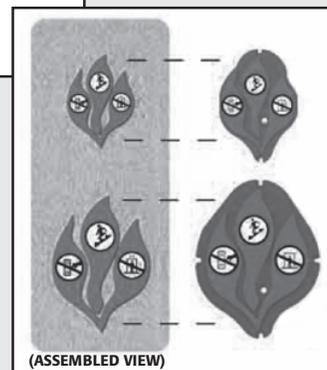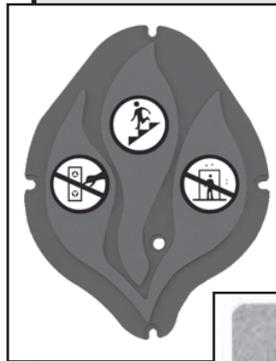

Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915
 or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

'In Case of Fire' Signs



4001 (6"x7") 4001-A (8"x10")
4001-B (3"x3.5")



4011 (6"x7") 4011-A (8"x10")
4011-B (3"x3.5")



4002 (6"x7")



4021 (6"x7") 4021-A (8"x10")
4021-B (3"x3.5")



4501 (6"x7") 4051-A (8"x10")
4501-B (3"x3.5")



4601 (6"x7")



4113 (6"x7")



4071 (6"x7") 4071-A (8"x10")
4071-B (3"x3.5")



C4001NS1-A (6"x9")
OPTIONAL TEXT AVAILABLE



C4001-L (6"x9")
OPTIONAL TEXT AVAILABLE



4002-D (3.5"x8.5")



4011-D (3.5"x8.5")



4001-SP (6"x7")



4011-SP (6"x7")



4002-C (8"x3.5")

Questions? Answers at...

30.12 Western US: 866 CED-ELEV Eastern US: 866-253-2915
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

Acrylic Escalator Safety, No Smoking & Capacity

Signs

The long-lasting anti-fading signs on the following pages are available with stainless steel, antique brass, brass and aluminum backgrounds.

Decals

Many of the elevator and escalator signs on the following pages are available as decals. Custom decals are also available. All decals are produced on 3mm decal material.

Data Tags

Data tags are made from 1/32" aluminum, or 1/32" enamel coated aluminum. Most data tags are custom made for individual companies. If you need a custom sign, fax us an example and we can have it recreated. All tags are available with holes or a 3M adhesive backing



ES-1



ES-12



ES-12-SP



CAP-11A (4.5"x11") CAP-11 (10"x3')



ES-SR1 (4"x7")



ES-SR1-SP (4"x7")



ES-C1 (5"x9.5")



9102 (5"x7")



9101(5"x7")



9103-LA (5"x8")



9301 (10x3.5")



CAP-32 (4"x2.5")

Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

Main Station or Phase I Signs



6001



6002



6102



6103



6201



6301



6401



6501




6601




6931



6935




6302




6502




5002

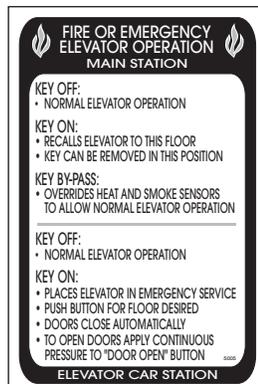

5005

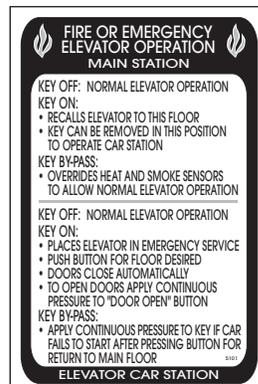

5101

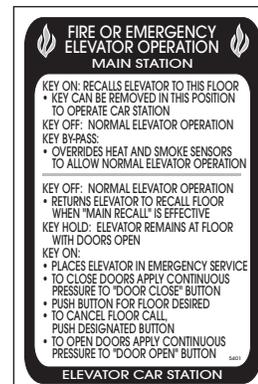

5401

Questions? Answers at...

Car Station or Phase II Signs

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF:

- NORMAL ELEVATOR OPERATION
- RETURNS ELEVATOR TO RECALL FLOOR WHEN "MAIN RECALL" IS EFFECTIVE

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- MAINTAIN PRESSURE ON BUTTON TO CLOSE DOORS
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

ELEVATOR CAR STATION

7001

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF: NORMAL ELEVATOR OPERATION

- RETURNS ELEVATOR TO RECALL FLOOR WHEN "MAIN RECALL" IS EFFECTIVE

KEY HOLD: ELEVATOR REMAINS AT FLOOR WITH DOORS OPEN

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- TO CLOSE DOORS APPLY CONTINUOUS PRESSURE TO "DOOR CLOSE" BUTTON
- PUSH BUTTON FOR FLOOR DESIRED
- TO CANCEL FLOOR CALL, PUSH DESIGNATED BUTTON
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

ELEVATOR CAR STATION

7202

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

- TURN FIRE SWITCH TO "ON" POSITION
- PRESS AND HOLD "DOOR CLOSE" BUTTON TO CLOSE DOORS
- PRESS DESIRED FLOOR BUTTON
- PRESS AND HOLD "DOOR OPEN" BUTTON TO OPEN DOORS
- PRESS "CALL CANCEL" BUTTON TO CANCEL CALL
- TURN KEY "OFF" TO ALLOW AUTOMATIC RETURN TO INITIATING LANDINGS
- TURN KEY TO "HOLD" ELEVATOR AT FLOOR

MAIN STATION

8601

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF:

- NORMAL ELEVATOR OPERATION

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- HOLD BUTTON FOR FLOOR DESIRED
- DOORS CLOSE AUTOMATICALLY
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

ELEVATOR CAR STATION

7002

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF:

- NORMAL ELEVATOR OPERATION

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- PUSH BUTTON FOR FLOOR DESIRED
- HOLD "DOOR CLOSE" BUTTON UNTIL DOORS CLOSE AND CAR STARTS
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

MAIN STATION

8003

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

- TURN FIRE SWITCH TO "ON" POSITION
- PRESS DESIRED FLOOR BUTTON
- PRESS AND HOLD "DOOR CLOSE" BUTTON TO CLOSE DOORS
- PRESS AND HOLD "DOOR OPEN" BUTTON TO OPEN DOORS
- PRESS "RESET" BUTTON TO CANCEL CALL
- TURN KEY "OFF" TO ALLOW AUTOMATIC RETURN TO INITIATING LANDINGS
- TURN KEY TO "HOLD" ELEVATOR AT FLOOR

ALTERNATE STATION

8602

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF:

- NORMAL ELEVATOR OPERATION

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- PUSH BUTTON FOR FLOOR DESIRED
- MAINTAIN PRESSURE ON BUTTON TO CLOSE DOORS
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

ELEVATOR CAR STATION

7003

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF:

- NORMAL ELEVATOR OPERATION

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- TO CLOSE DOORS APPLY CONTINUOUS PRESSURE TO "DOOR CLOSE" BUTTON
- PUSH BUTTON FOR FLOOR DESIRED
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

MAIN STATION

8004

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF: NORMAL ELEVATOR OPERATION

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- PUSH BUTTON FOR FLOOR DESIRED
- DOORS CLOSE AUTOMATICALLY
- TO CANCEL FLOOR SELECTED, PRESS "DOOR OPEN" BUTTON

KEY HOLD: ELEVATOR REMAINS AT FLOOR WITH DOORS OPEN

ELEVATOR CAR STATION

8801

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF:

- NORMAL ELEVATOR OPERATION

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- PUSH FLOOR BUTTON AND HOLD FOR FLOOR DESIRED
- HOLD "DOOR CLOSE" BUTTON UNTIL DOORS CLOSE AND CAR STARTS
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

ELEVATOR CAR STATION

7004

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF:

- NORMAL ELEVATOR OPERATION

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- PUSH BUTTON FOR FLOOR DESIRED
- MAINTAIN PRESSURE ON BUTTON TO CLOSE DOOR
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

ALTERNATE STATION

8005

**FIREFIGHTERS
ELEVATOR OPERATION**

TO OPERATE CAR

- INSERT FIRE KEY AND TURN TO "ON"
- PRESS DESIRED FLOOR BUTTON
- TO CANCEL FLOOR SELECTION, PRESS "CALL CANCEL" BUTTON
- TO CLOSE POWER OPERATED DOOR, PRESS AND HOLD "DOOR CLOSE" BUTTON
- TO OPEN POWER OPERATED DOOR, PRESS AND HOLD "DOOR OPEN" BUTTON
- TO HOLD CAR AT FLOOR WITH DOORS OPEN, TURN KEY TO "HOLD"
- TO AUTOMATICALLY SEND CAR TO RECALL FLOOR WITH DOORS OPEN, TURN KEY TO "OFF"

PHASE-II

8802

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF: NORMAL ELEVATOR OPERATION

- RETURNS ELEVATOR TO RECALL FLOOR WHEN "MAIN RECALL" IS EFFECTIVE

KEY HOLD:

- ELEVATOR REMAINS AT FLOOR WITH DOORS OPEN

KEY ON: PLACES ELEVATOR IN EMERGENCY SERVICE

- TO START ELEVATOR, HOLD BUTTON FOR DESIRED FLOOR, WHILE DOORS ARE CLOSING AND UNTIL CAR IS IN MOTION
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

ELEVATOR CAR STATION

7201

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

KEY OFF:

- NORMAL ELEVATOR OPERATION
- RETURNS ELEVATOR TO RECALL FLOOR WHEN "MAIN RECALL" IS EFFECTIVE

KEY HOLD:

- HOLDS CAR AT FLOOR WITH DOORS OPEN

KEY ON:

- PLACES ELEVATOR IN EMERGENCY SERVICE
- TO CLOSE DOORS, APPLY CONTINUOUS PRESSURE TO "DOOR CLOSE" BUTTON
- PUSH BUTTON FOR FLOOR DESIRED
- TO CANCEL FLOOR CALL, PUSH DESIGNATED BUTTON
- TO OPEN DOORS APPLY CONTINUOUS PRESSURE TO "DOOR OPEN" BUTTON

ELEVATOR CAR STATION

7210

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

- TURN FIRE SWITCH TO "ON" POSITION
- PRESS DESIRED FLOOR BUTTON
- PRESS AND HOLD "DOOR CLOSE" BUTTON TO CLOSE DOORS
- PRESS AND HOLD "DOOR OPEN" BUTTON TO OPEN DOORS
- PRESS "CALL CANCEL" BUTTON TO CANCEL CALL
- TURN KEY "OFF" AND CLOSE DOORS TO ALLOW AUTOMATIC RETURN TO EMERGENCY LANDING
- TURN KEY TO "HOLD" ELEVATOR AT FLOOR
- WHEN LIGHT AND SIGNAL INDICATE EMERGENCY - CLOSE DOORS SO ELEVATOR CAN RETURN TO EMERGENCY LANDING

ELEVATOR CAR STATION

7402

**FIRE OR EMERGENCY
ELEVATOR OPERATION**

FOR RECALLING ELEVATORS:

- "ON" POSITION RECALLS ELEVATORS TO THIS LANDING
- "OFF" POSITION ALLOWS AUTOMATIC ELEVATOR OPERATION TO USE ELEVATORS:
- TURN EMERGENCY OPERATION SWITCH TO "ON" POSITION
- PRESS "DOOR CLOSE" BUTTON TO CLOSE DOORS
- PUSH BUTTON FOR FLOOR DESIRED
- TURN EMERGENCY OPERATION SWITCH TO "OFF" POSITION TO RELEASE ELEVATORS

ELEVATOR CAR STATION

7311

Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

Warning & Danger Signs Data Tags



D-51 (10"x 8")



FRT-11 (10"x 8")

COMPANY NAME HERE
1-YEAR LOAD TEST
ELEVATOR# _____
RELIEF PRESSURE LBS. _____
TEST DATE _____

DT-1Y (4"x 2")



D-61 (10"x 8")



FRT-61 (10"x 8")

COMPANY NAME HERE
5-YEAR LOAD TEST
ELEVATOR# _____
RELIEF PRESSURE LBS. _____
TEST DATE _____


DT-5Y (4"x 2")




D-71 (10"x 8")




W-11 (4"x 2.25")



IEBI-1 (6"x 3")



EEQ-11 (10"x 2.25")



SEDF-1 (4"x 2.25")

ST-1
SAFETY TEST
ELECTRIC
HYDRAULIC
ANNUAL
5-YEAR
3-YEAR
GOVERNOR TEST
RELIEF VALVE TEST
BUFFER TEST
TEST PERFORMED
JAN 1998
FEB 1999
MAR 2000
APR 2001
MAY 2002
JUN 2003
JUL 2004
AUG 2005
SEP 2006
OCT 2007
NOV 2008
DEC 2009
COMP. NAME _____

| COMPANY NAME | | |
|--------------------|------------------|------|
| PERMIT NO. _____ | | |
| FULL LOAD PS.I. | BY PASS PS.I. | DATE |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

DT (3"x 5")

COMPANY NAME HERE
CAPACITY _____ LBS. SPEED _____ FPM
WT. OF CAR _____ LBS. DATE INSTALLED _____
PLUNGER _____ O.D. IN. PLUNGER WALL _____ IN.
STATE PERMIT# _____

DT-HYD (3.75"x 1.75")



HE-2 (8"x 4")



STAR-B (3.5"x 3.5")

COMPANY NAME HERE
CAPACITY _____ LBS. SPEED _____ FPM
WT. OF CAR _____ LBS. DATE INSTALLED _____
NO. OF ROPES _____ TYPE _____ SIZE _____
STRENGTH _____ STATE PERMIT# _____

DT-CBL (3.75"x1.75")

Questions? Answers at...


Warning & Danger Signs Data Tags

| | | |
|---|--|---|
| <p>Title 8 Group II</p> <p>TITLE 8-II</p> | <p>"KEEP SWITCH CLOSED EXCEPT DURING MAINTENANCE, REPAIRS, AND INSPECTIONS"</p> <p>KSC</p> | <p>ELEVATOR HYDRAULIC OIL LINE</p> <p>HELDEC</p> |
| <p>Title 8 Group III</p> <p>TITLE 8-III</p> | <p>TITLE 8 GROUP IV ASME A17.1 2004</p> <p>ASME IV</p> | <p>SHOULD THE ELEVATOR DOORS FAIL TO OPEN DO NOT BECOME ALARMED, PLEASE USE BUTTON MARKED "ALARM" OR TELEPHONE (IF FURNISHED) TO SUMMON AID. ELEVATOR COMPANIES ARE ON CALL 24 HOURS A DAY FOR EMERGENCY SERVICE.</p> <p>SEDF-2</p> |
| <p>FIREFIGHTER'S OPERATION TO RECALL ELEVATORS INSERT FIRE KEY AND TURN TO "ON"</p> <p>6107</p> | <p>ASME A17.1-1996</p> <p>ASME-1</p> | |
| | | <p>ALTERATIONS A17.1-1996 PART XII RULE</p> <p>ALT RULES</p> |

Certificate Frames

Certificate Frames

- Stainless steel, bronze or mirrored stainless finish with acrylic windows
- Hidden mounting screws prevent vandalism
- Mounts vertically or horizontally
- Available with "NO SMOKING" silk screened on frames. Add **NS** to part number (short side) or **NSL** (long side)

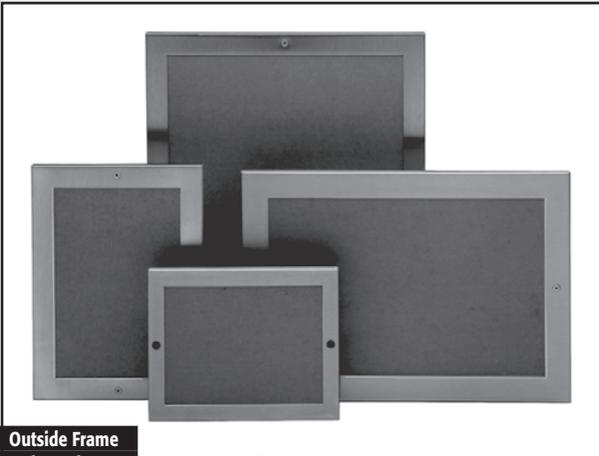

| Stainless Part Number | Bronze Part Number | Mirrored Stainless | Mirrored Bronze | Inside Window Dimensions | Outside Frame Dimensions |
|-----------------------|--------------------|--------------------|-----------------|--------------------------|--------------------------|
| CF34 | CF34B | CF34MS | CF34MB | 3 1/2" x 4 3/4" | 4 1/2" x 5 3/4" |
| CF46 | CF46B | CF46MS | CF46MB | 4" x 6" | 5 1/2" x 7 1/2" |
| CF48 | CF48B | CF48MS | CF48MB | 4 1/4" x 8 1/4" | 5 3/4" x 9 3/4" |
| CF69 | CF69B | CF69MS | CF69MB | 5 5/8" x 8 5/8" | 7 1/8" x 10 1/8" |
| CF810 | CF810B | CF810MS | CF810MB | 7 3/4" x 9 3/4" | 9 1/4" x 11 1/4" |
| CF8514 | CF8519B | - | - | 8 1/2" x 14" | 10" x 15 1/2" |

Replacement Parts

| Part Number | Description |
|-------------|-------------------------------|
| 51CF001 | Screws for certificate frames |
| 51CF001W | Replacement Wrench |



Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

